


## Aqualift F XL, 450 L lift. stat. Duo, SPF 4500-S1

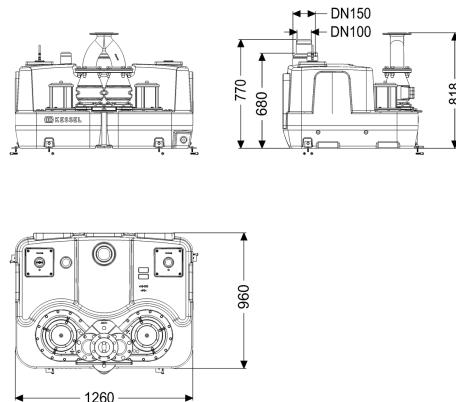

### Article information

Item no.: 11126  
 GTIN: 4026092057933  
 Price group: 50

### Advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Maximum operating reliability due to intelligent control unit (Duo)

### Description

The lifting station for faecal and faecal-free wastewater is equipped with one or two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

#### Variant

Type of system: duo pump  
 Shut-off valve: without shut-off valve  
 Pressure pipe connection: vertical

#### General characteristics

Colour: black  
 Standard: EN 12050-1  
 Type of wastewater: with sewage  
 Installation situation: free-standing installation  
 System type: Duo

#### Dimensions

Net weight: 205 kg  
 Gross weight: 225 kg  
 Packaging dimension: length  
 Packaging dimension: width  
 Packaging dimension: height

Tank/drain body  
Tank volume: 450 l

Pumping device  
Pump: SPF 4500-S1  
Number of pumps: 2  
Operating voltage: 400 V  
Operating mode: S1  
Impeller type: Multi-vane impeller  
Free passage: 40 mm  
Length of mains cable for pump: 5 m

Control  
Control unit: Comfort  
Level measurement instrument: Immersion pipe  
Type of level measurement: pneumatic  
Mains frequency: 50 Hz  
Operating voltage: 400 V  
Type of fuse required (control unit): 3 x C 25 A