


Shell Kit for Ecolift, w/o socket, tileable

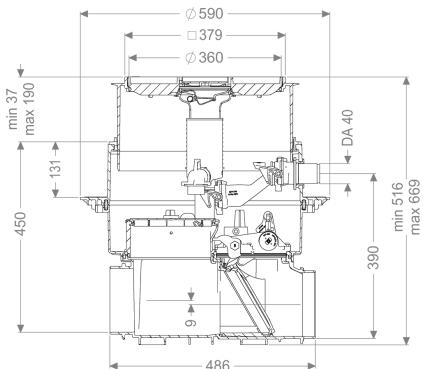

Article information

Item no.: 21000X-RBK

GTIN: 4026092097120

Price group: 20

Description

KESSEL shell kit for Ecolift, without sockets, tileable

Shell kit consisting of a drain body, upper section and flange for joint sealing. The inlet and outlet sockets are not included.

For combination with a KESSEL technology kit for creating an Ecolift backwater lifting station.

General characteristics

Colour:

black

Type of wastewater:

with sewage

Installation situation:

floor slab installation

Delivery state:

Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected)

Approval:

Z-53.2-487

Motor type:

KSM 140

Type de protection moteur:

IP 68 (3m/48h)

Dimensions

Net weight:

25 kg

Gross weight:

30,5 kg

Groundwater resistant from lower edge of base section:

3000 mm

Installation depth:

516 - 669 mm

Type of height adjustability: vertically adjustable upper section
Length: 590 mm
Width: 590 mm
Packaging dimension: length
Packaging dimension: width
Packaging dimension: height

Tank/drain body
Nominal pressure (PN): 6
Pressure pipe connection (OD): 40 mm
Socket version: optional

Coverage features

Type of cover: tileable cover plate
Cover material: Polymer
Width of cover: 366 mm
Length of cover: 366 mm
Drainage function: yes
Locking: Lock & Lift
Load class: K 3 (EN 1253-1)
Max. flooring height: 16 mm

: