


## Hybrid lifting station Ecolift L Mono, FKA, SPF 1350-S3

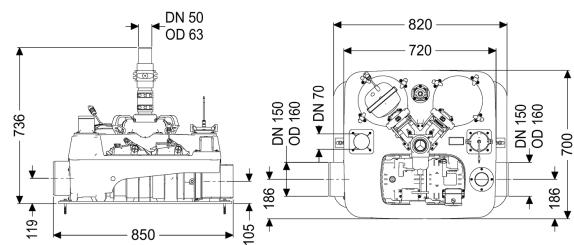

### Article information

Item no.: 22002  
 GTIN: 4026092105801  
 Price group: 20

### Advantages

- Hybrid function: uses the natural fall to the sewer - pump is only used in case of backwater
- Quiet and energy-saving
- Double safety due to backwater flap and pressure loop

### Description

The alternative to a sewage lifting station. For faecal wastewater, bottom section made of PE-LD, for installation in an exposed drainage pipe, drainage via the gravity pipe to the sewer. Lifting function with one pump or two pumps, only in the event of backwater, the backwater flap can be closed by a motor, with an additional hinged flap. Drainage during the backwater phase takes place via an on-site pressure pipe that can be connected above the backwater level. Including a backflow preventer and shut-off valve for the pressure pipe. Including penetration seals DN 70 for the on-site ventilation pipe Polymer closure system for the drainage pipe for safe closure of the drainage pipe in the event of backwater. Consisting of a hinged flap including an emergency closure (for manual locking if required) and an electrically powered closure mechanism including a probe protected against wire breakage for the detection of backwater. Control unit with an integrated self-diagnosis system (SDS), display of the operating states and integrated battery back-up for alarm signals. User-friendly menu guidance in a multi-line display. With a self-diagnosis system (SDS) and reminder when maintenance is due. Display of the current measured values. Simple adjustment of the function-related parameters, including the operating hour counter and potential-free contact. Optional relaying of alarm and collective error messages via the GSM interface. Control unit with a full text display in six languages.

General characteristics

Colour: black  
 Type of wastewater: with sewage

Installation situation: exposed drainage pipe  
 Approval: Z-53.2-493  
 Type de protection moteur: IP 68

Dimensions  
 Net weight: 39,53 kg  
 Gross weight: 65,25 kg  
 Length: 700 mm  
 Width: 850 mm  
 Height: 736 mm  
 Packaging dimension: length  
 Packaging dimension: width  
 Packaging dimension: height

Tank/drain body  
 Pressure pipe connection (DN): 50  
 Pressure pipe connection (OD): 63 mm  
 Outlet nominal size (DN): 150 mm  
 Pumping volume: 20 l

Wastewater contents  
 Total volume: 66 l

Pumping device  
 Pump: SPF 1350  
 Number of pumps: 1  
 Operating voltage: 230 V  
 Rated current: 6 A  
 Protection class (pump): IP 68 (3m/48h)  
 Max. pumping capacity: 26 m<sup>3</sup>/h  
 Max. pumping height: 10 m  
 Power P1: 1,35 kW  
 Power P2: 0,86 kW  
 Operating mode: S3 - 50 %  
 Type of fuse required (electrical protection): C 16 A  
 Impeller type: Multi-vane impeller  
 Free passage: 40 mm  
 Length of mains cable for pump: 5 m  
 Length of mains cable for flap motor: 5 m

Control  
 Control unit: Comfort  
 Level measurement instrument: Immersion pipe  
 Type of level measurement: pneumatic  
 Mains frequency: 50 Hz  
 Operating voltage: 230 V  
 Length of mains cable for control unit: 1 m  
 Type of fuse required (electrical protection): C 16 A