


## Shell Kit for Pumpfix F, without nozzles, bl.cover

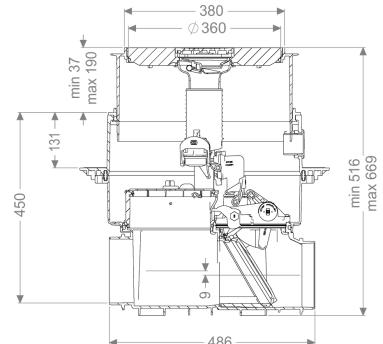

### Article information

Item no.: 24000S-RBK

GTIN: 4026092097069

Price group: 30

### Description

KESSEL shell kit for Pumpfix F, without sockets, black cover

Shell kit consisting of a drain body, upper section and flange for joint sealing. The inlet and outlet sockets are not included.

For combination with a KESSEL technology kit for creating a Pumpfix F backwater pumping station.

#### General characteristics

Colour:

black

Type of wastewater:

with sewage

Installation situation:

floor slab installation

Delivery state:

Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected)

Approval:

Z-53.2-388

Motor type:

KSM 140

Type de protection moteur:

IP 68 (3m/48h)

#### Dimensions

Net weight:

15,2 kg

Gross weight:

18 kg

Groundwater resistant from lower edge of base section:

3000 mm

Cutout dimension, width:

750 mm

Cutout dimension, length:	750 mm
Vertical drop between inlet and outlet:	9 mm
Installation depth:	516 - 669 mm
Type of height adjustability:	vertically adjustable upper section
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Tank/drain body	
Socket version:	optional
<b>Coverage features</b>	
Type of cover:	Cover plate with slotted cover
Cover material:	Polymer
Colour of cover:	black
Width of cover:	366 mm
Length of cover:	366 mm
Drainage function:	yes
Locking:	Lock & Lift
Load class:	L 15 (EN 1253-1)

: