


Shell Kit for Pumpfix F, without nozzles, tileable

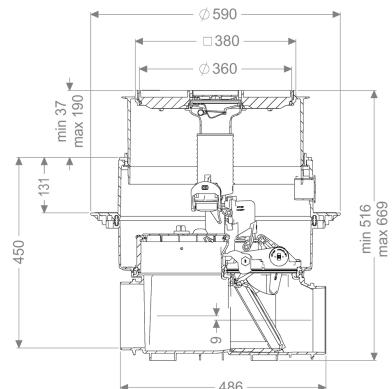

Article information

Item no.: 24000X-RBK

GTIN: 4026092097052

Price group: 30

Description

KESSEL shell kit for Pumpfix F, without sockets, tileable

Shell kit consisting of a drain body, upper section and flange for joint sealing. The inlet and outlet sockets are not included.

For combination with a KESSEL technology kit for creating a Pumpfix F backwater pumping station.

General characteristics

Colour:

black

Type of wastewater:

with sewage

Installation situation:

floor slab installation

Delivery state:

Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected)

Approval:

Z-53.2-388

Motor type:

KSM 140

Type de protection moteur:

IP 68 (3m/48h)

Dimensions

Net weight:

13,74 kg

Gross weight:

16,55 kg

Groundwater resistant from lower edge of base section:

3000 mm

Cutout dimension, width:

750 mm

Cutout dimension, length:	750 mm
Vertical drop between inlet and outlet:	9 mm
Installation depth:	516 - 669 mm
Type of height adjustability:	vertically adjustable upper section
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Tank/drain body	
Socket version:	optional
Coverage features	
Type of cover:	tileable cover plate
Cover material:	Polymer
Width of cover:	366 mm
Length of cover:	366 mm
Drainage function:	yes
Locking:	Lock & Lift
Load class:	K 3 (EN 1253-1)
Max. flooring height:	16 mm

: