
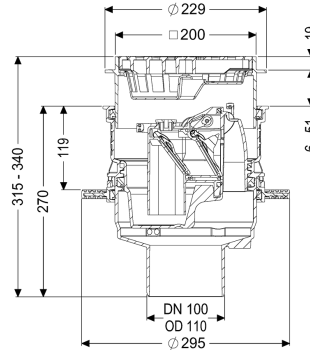


Universal Plus basement drain ver., black, Backw.valve, Waterpr.concr.



Article information

Item no.: 27631
 GTIN: 4026092096864
 Price group: 10

Advantages

- Sustainable due to use of recycled material
- Inlets above the floor slab, no penetration required
- Vertical outlet for easy installation and easy access to the main drainage pipe

Description

The polymer Universal Plus basement drain is used for drainage of non-faecal wastewater and is equipped with a removable backwater valve with two backwater flaps and a one hand-lockable emergency closure.

Including temporary protective cover.

The drain is pressure-waterproof up to 0.6 bar (MFPA Leipzig tested) and radon-tight (IAF Radioökologie GmbH tested).

Variant

Contents of sludge trap:	yes
Emergency closure:	yes
Waterproof flange:	Pre-assembled at the factory
Sealing water height:	60 mm
Discharge rate (l/s) with 10 mm threshold:	1,4
Discharge rate (l/s) with 20 mm threshold:	1,9
Mechanical backwater flaps:	2

General characteristics

Colour:	black
Standard:	EN 1253
Nominal size (DN):	100
Type of wastewater:	without sewage

Installation situation: floor slab installation
Backwater protection: Type 5
Sustainable: through the use of recycled material

Dimensions

Net weight: 3,21 kg
Gross weight: 3,62 kg
Diameter: 295 mm
Cutout dimension, width: 310 mm
Cutout dimension, length: 310 mm
Adjustment range: 23 - 80
Installation depth: 293 - 350 mm
Type of height adjustability: vertically adjustable upper section
Height: 270 mm
Packaging dimension: length
Packaging dimension: width
Packaging dimension: height

Tank/drain body

Socket version: vertical

Coverage features

Type of cover: Slotted cover
Cover material: Polymer
Colour of cover: black
Width of cover: 200 mm
Height of cover: 25 mm
Length of cover: 200 mm
Load class: K 3 (EN 1253-1)
Contents of sludge trap: yes