


## Lifting station Minilift L KTP 300, resistant, free-standing set-up

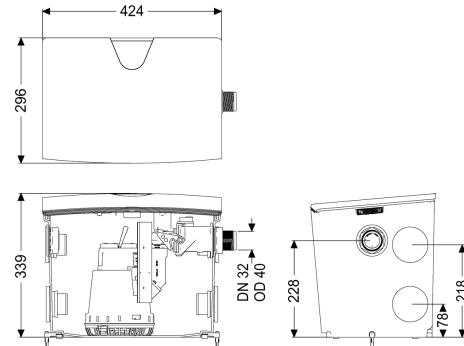

### Article information

Item no.: 28561C  
 GTIN: 4026092096987  
 Price group: 20

### Advantages

- Resistant to hot water
- Variable top and side inlets
- Easy tool-free maintenance

### Description

The plug-in ready Minilift L small lifting station is suitable for the disposal of domestic wastewater and ideal for connecting a shower, bathtub, washbasin, sink, dishwasher or washing machine.

The submersible pump with float switch can be removed easily with the help of one-handed closures. The collection tank made of polymer has an open pump tank and is resistant to aggressive wastewater. Due to its numerous inlets (4x DN 50 horizontal, 1x DN 40 vertical) and adaptable outlets

The system offers flexible and simple options for on-site installation.

- Resistance to hot water and brine
- Discharge side backflow preventer integrated in the factory
- Powerful pump with multi-vane vortex impeller for maximum operating safety
- Tool-free maintenance

#### Variant

Type of system:

Resistant:

Single unit

Resistant to waste water containing salt, softener and condensate

Pump control:

Float switch

Backflow preventer:

integrated

Pressure pipe connection:

horizontal

#### General characteristics

Colour:

white

Standard: EN 12050-2  
 Type of wastewater: without sewage  
 Installation situation: free-standing installation  
 Delivery state: plug-in ready

Dimensions  
 Net weight: 10,3 kg  
 Gross weight: 10,3 kg  
 Length: 425 mm  
 Width: 300 mm  
 Height: 340 mm  
 Packaging dimension: length  
 Packaging dimension: width  
 Packaging dimension: height

Tank/drain body  
 Pressure pipe connection (DN): 32  
 Pressure pipe connection (OD): 40 mm  
 Number of inlets: 5  
 Tank volume: 30 l  
 Inlet vertical (DN): 40  
 Inlet horizontal (DN): 50

Pumping device  
 Pump: KTP 300 resistant  
 Number of pumps: 1  
 Weight, pump: 4,5 kg  
 Connection type: Schuko (earthed contact) 2-pin  
 Protection class: I  
 Protection class (pump): IP 68 (3m)  
 Temperature monitoring: integrated  
 Max. temperature (permanent) of conveyed material: 40 °C  
 Hot water resistance for a short time (2 min): 80 °C  
 Max. pumping capacity: 8 m<sup>3</sup>/h  
 Max. pumping height: 6 m  
 Speed: 2800 U/min  
 Power P1: 0,34 kW  
 Power P2: 0,21 kW  
 Operating mode: S1  
 Type of pump connection cable: H07RN-F 3G 1.5 mm<sup>2</sup>  
 Impeller type: Multi-vane impeller  
 Free passage: 10 mm  
 Type of fuse required (pump): C 16 A  
 Length of mains cable for pump: 5 m  
 Rated current: 1,6 A

Control  
 Level measurement instrument: Float switch  
 Type of level measurement: mechanical

Mains frequency:  
Operating voltage:  
Connection type:

50 Hz  
230 V  
Schuko (earthed contact) 2-pin