


Lifting station Minilift L GTF 500, free-standing set-up

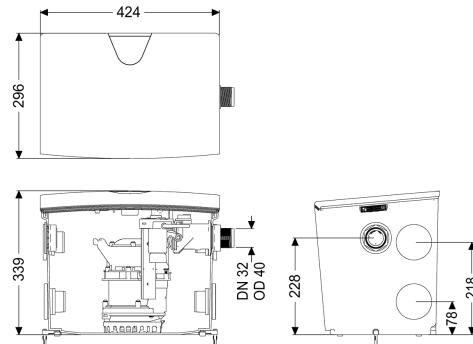

Article information

Item no.: 28562
 GTIN: 4026092096994
 Price group: 20

Advantages

- Resistant to hot water
- Variable top and side inlets
- Easy tool-free maintenance

Description

The plug-in ready Minilift L small lifting station is suitable for the disposal of domestic wastewater and ideal for connecting a shower, bathtub, washbasin, sink, dishwasher or washing machine.

The submersible pump with float switch can be removed easily with the help of one-handed closures. The collection tank made of polymer has an open pump tank and is resistant to aggressive wastewater. Due to its numerous inlets (4x DN 50 horizontal, 1x DN 40 vertical) and adaptable outlets

The system offers flexible and simple options for on-site installation.

- Resistance to hot water and brine
- Discharge side backflow preventer integrated in the factory
- Powerful pump with multi-vane vortex impeller for maximum operating safety
- Tool-free maintenance

Variant

Type of system:	Single unit
Pump control:	Float switch
Backflow preventer:	integrated
Pressure pipe connection:	horizontal

General characteristics

Colour:	white
Standard:	EN 12050-2
Type of wastewater:	without sewage

Installation situation: free-standing installation
 Delivery state: plug-in ready

Dimensions
 Net weight: 12,1 kg
 Gross weight: 12,1 kg
 Length: 425 mm
 Width: 300 mm
 Height: 340 mm
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Tank/drain body
 Pressure pipe connection (DN): 32
 Pressure pipe connection (OD): 40 mm
 Number of inlets: 5
 Tank volume: 30 l
 Inlet vertical (DN): 40
 Inlet horizontal (DN): 50

Pumping device
 Pump: GTF 500
 Number of pumps: 1
 Weight, pump: 6 kg
 Connection type: Schuko (earthed contact) 2-pin
 Operating voltage: 230 V
 Protection class: I
 Protection class (pump): IP 68 (3m)
 Temperature monitoring: integrated
 Max. temperature (permanent) of conveyed material: 40 °C
 Hot water resistance for a short time (2 min): 80 °C
 Max. pumping capacity: 10 m³/h
 Max. pumping height: 8 m
 Speed: 2800 U/min
 Power P1: 0,6 kW
 Power P2: 0,36 kW
 Operating mode: S1
 Type of pump connection cable: H07RN-F 3G 1.5 mm²
 Impeller type: Multi-vane impeller
 Free passage: 10 mm
 Type of fuse required (pump): C 16 A
 Length of mains cable for pump: 5 m
 Rated current: 2,7 A

Control
 Level measurement instrument: Float switch
 Type of level measurement: mechanical
 Mains frequency: 50 Hz

Operating voltage:
Connection type:

230 V
Schuko (earthed contact) 2-pin