


Lifting station Aqualift F Duo Standard, SPF 3000-S3, shut-off valve

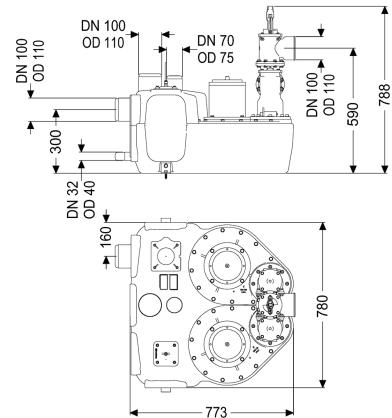

Article information

Item no.: 28631
 GTIN: 4026092007716
 Price group: 20

Advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Control unit with self-diagnosis system

Description

The lifting station for faecal and faecal-free wastewater is equipped with two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

Variant

Type of system: duo pump
 Shut-off valve: Shut-off valve made of polymer
 Retaining bracket for the lift protection: yes
 Sound absorption mat: yes
 Pump control: Control unit
 Backflow preventer: integrated
 Pressure pipe connection: horizontal

General characteristics

Colour: black
 Standard: EN 12050-1
 Type of wastewater: with sewage
 Installation situation: free-standing installation
 Delivery state: Installation-ready (electrical components, connection parts must be connected on site)

Dimensions

Net weight: 91,55 kg

Gross weight:	95,15 kg
Length:	773 mm
Width:	780 mm
Height:	788 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Tank/drain body	
Pressure pipe connection (DN):	100
Pressure pipe connection (OD):	110 mm
Connection for manual diaphragm pump (DN):	32
Venting connection (DN):	70
Distance from centre of outlet pipe to tank bottom:	590 mm
Distance pipe bottom inlet to tank bottom:	245 mm
Distance from centre of inlet pipe to tank bottom:	300 mm
Inlet max. scoring (DN):	150 mm
Inlet nominal size (OD):	110 mm
Inlet nominal size (DN):	100 mm
Number of inlets:	2
Pumping volume:	50 l
Tank volume:	120 l

Pumping device	
Pump:	SPF 3000-S3
Number of pumps:	2
Weight, pump:	24 kg
Connection type:	Direct connection
Operating voltage:	400 V
Protection class:	I
Insulation class:	F
Cos phi - power factor:	0,89
Protection class (pump):	IP 68 (3m/48h)
Temperature monitoring:	integrated
Max. temperature (permanent) of conveyed material:	40 °C
Max. pumping capacity:	47 m ³ /h
Max. pumping height:	16 m
Speed:	2845 U/min
Power P1:	3,2 kW
Power P2:	2,7 kW
Operating mode:	S3 - 50 %
Type of pump connection cable:	H07RN-F 7G 1.5 mm ²
Impeller type:	Multi-vane impeller
Free passage:	40 mm
Length of mains cable for pump:	5 m
Rated current:	5,4 A

Control	Standard
Control unit:	yes
Motor protection switch:	Immersion pipe
Alarm sensor:	Immersion pipe with pressure monitor
Level measurement instrument:	pneumatic
Type of level measurement:	IP 54
Protection class control unit:	50 Hz
Mains frequency:	400 V
Operating voltage:	Direct connection
Connection type:	yes
Potential-free contact:	yes
Log book function:	no
Multi-line display:	yes
Battery buffering:	yes
Self-diagnosis system (SDS):	yes