



The Ultraflat 79 floor drain DN 50, Variofix, Design grating, Kessel

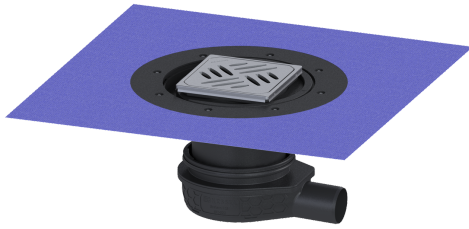

Article information

Item no.: 44700.52
 GTIN: 4026092080955
 Price group: 10

Advantages

- Low installation depth
- Scientifically confirmed sound insulation effect
- different design covers

Description

The Ultraflat 79 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section.

Variant	
System:	125
Seepage opening:	optional
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W3-I
Sealing water height:	50 mm
Discharge rate (l/s) with 10 mm threshold:	1,2
Discharge rate (l/s) with 20 mm threshold:	1,4
General characteristics	
Standard:	EN 1253-1
Nominal size (DN):	50
Outer diameter (OD):	50 mm
Odour trap:	included
Sustainable:	through the use of recycled material
Dimensions	
Vertical adjustment:	119 - 174 mm
Net weight:	2,12 kg
Gross weight:	2,12 kg

Type of height adjustability:	vertically adjustable upper section
Length:	312 mm
Width:	312 mm
Height:	79 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Tank/drain body	
Number of outlets:	1
Material of drain body:	ABS
Socket version:	lateral
Coverage features	
Type of cover:	Design cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Width of cover:	120 mm
Height of cover:	16 mm
Length of cover:	120 mm
Min. flooring height:	10 mm
Surface:	ground
Frame material:	Stainless steel 14301
Locking:	unlocked
Load class:	L 15 (EN 1253-1)
Grating design:	Kessel
Slip resistance class:	R9 according to DIN 51130; C according to DIN 51097
Rim width:	132 mm
Rim length:	132 mm
Max. flooring height:	23 mm
Shape of upper section:	square
Upper section material:	ABS