



Variofix upper section Slotted cover, 316 SST, K 3

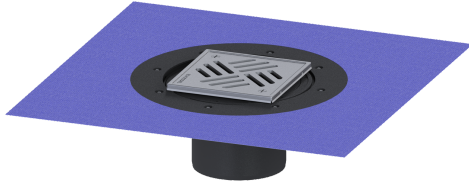

Article information

Item no.: 48206
 GTIN: 4026092066546
 Price group: 10

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

System:

125

Seal:

Lip seal

Waterproofing layer on the upper section:

Enclosed sealing collar to be glued (bd) according to DIN 18534

Water exposure class in accordance to DIN 18534-1 (up to and including):

W3-I

General characteristics

Sustainable:

through the use of recycled material

Dimensions

Vertical adjustment:

10 - 18 mm

Net weight:

0,85 kg

Gross weight:

1,86 kg

Diameter:

312 mm

Type of height adjustability:

vertically adjustable upper section

Height:

120 mm

Packaging dimension:

length

Packaging dimension:

width

Packaging dimension:

height

Coverage features

Type of cover:	Slotted cover
Cover material:	316 stainless steel
Colour of cover:	silver
Min. flooring height:	9 mm
Frame material:	316 stainless steel
Locking:	screwed
Load class:	K 3 (EN 1253-1)
Grating design:	Kessel
Rim width:	150 mm
Rim length:	150 mm
Max. flooring height:	18 mm
Upper section:	adjustable in three dimensions
Shape of upper section:	square
Upper section material:	ABS