


Variofix upper section System 200, slotted cover, 304 SST, K 3

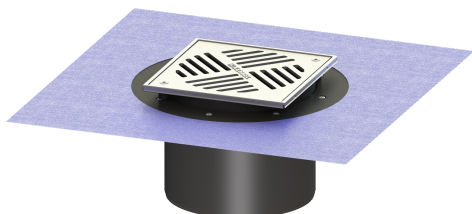

Article information

Item no.: 48968
 GTIN: 4026092004906
 Price group: 10

Description

The Variofix upper section is suitable for combination with project and bathroom drains and can be adjusted in height and at the side to the flooring, including temporary protective cover.

Variant

| | |
|--|---|
| System: | 200 |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W3-I |

Dimensions

| | |
|----------------------|---------|
| Net weight: | 2,25 kg |
| Gross weight: | 2,75 kg |
| Diameter: | 320 mm |
| Adjustment range: | 12 - 25 |
| Height: | 150 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

Coverage features

| | |
|-----------------------|--------------------------------|
| Cover material: | Stainless steel 14301 |
| Width of cover: | 198 mm |
| Length of cover: | 198 mm |
| Load class: | K 3 (EN 1253-1) |
| Grid size, length: | 200 mm |
| Grid size, width: | 200 mm |
| Max. flooring height: | 23 mm |
| Upper section: | adjustable in three dimensions |

Cover

| | |
|--------------------|--------|
| Grid size, length: | 200 mm |
|--------------------|--------|

Grid size, width:

200 mm