


Ferrofix upper section Sys 125, Slotted grating, 200 x 200 mm

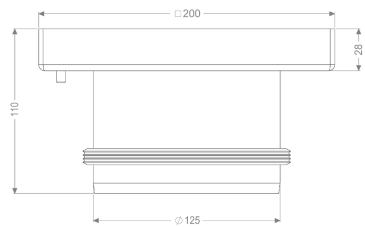

Article information

Item no.: 54916
 GTIN: 4026092072455
 Price group: 70

Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage.

Variant

System:

125

Note on installation depth:

For load class M 125, on-site shimming necessary

Waterproofing layer on the upper section:

Connection flange

General characteristics

Standard:

EN 1253-1

Dimensions

Net weight: 1,92 kg
 Gross weight: 2,02 kg
 Height: 100 mm
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Coverage features

Type of cover: Slotted cover
 Cover material: Stainless steel 14301
 Height of cover: 28 mm
 Min. flooring height: 28 mm

Surface:	pickled
Locking:	unlocked
Load class:	L 15 / M 125 (EN 1253-1)
Rim width:	200 mm
Rim length:	200 mm
Max. flooring height:	67 mm
Shape of upper section:	square
Upper section material:	Stainless steel 14301
Mesh size:	23 x 23 mm