


## Slotted Channel Ferrofix glued flange H: 15mm, 17x1000mm, outer

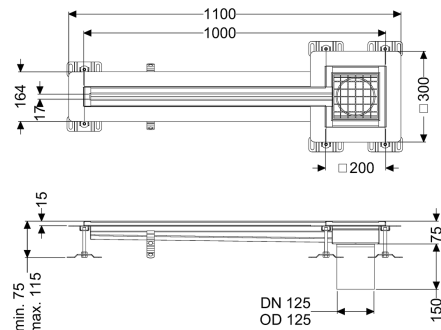

### Article information

Item no.: 6002101  
GTIN: 4026092099490  
Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Ferrofix slotted channel made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for joint sealing and has a circumferential adhesive edge (15 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is suitable for connecting waterproofing layers in accordance with DIN 18534, for all waterproofing classes.

#### Variant

|                                                                          |                                                  |
|--------------------------------------------------------------------------|--------------------------------------------------|
| Waterproofing layer on the upper section:                                | Adhesive flange (suitable for moisture barriers) |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W3-I                                             |
| Position of sink trap:                                                   | outside                                          |

#### General characteristics

|                      |                       |
|----------------------|-----------------------|
| Material:            | Stainless steel 14301 |
| Nominal size (DN):   | 125                   |
| Outer diameter (OD): | 125 mm                |
| Glued flange height: | 15 mm                 |

#### Dimensions

|               |         |
|---------------|---------|
| Net weight:   | 9 kg    |
| Gross weight: | 9 kg    |
| Length:       | 1700 mm |
| Width:        | 17 mm   |

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Height:                | 75 mm                                                |
| Coverage features      |                                                      |
| Type of cover:         | Slotted cover                                        |
| Colour of cover:       | silver                                               |
| Width of cover:        | 200 mm                                               |
| Length of cover:       | 200 mm                                               |
| Locking:               | placed                                               |
| Load class:            | L 15 (EN 1253-1)                                     |
| Slip resistance class: | R12 according to DIN 51130; C according to DIN 51097 |
| Slot width:            | 17 mm                                                |