


## Slotted Channel Ferrofix glued flange H: 15mm, 17x3000mm, outer

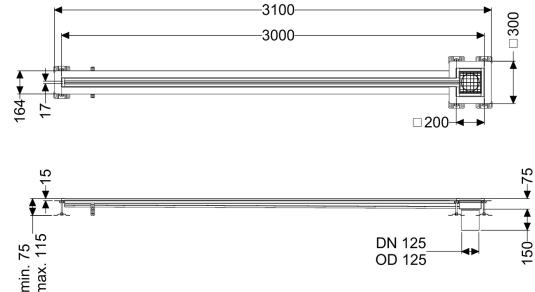

### Article information

Item no.: 6002301  
 GTIN: 4026092099551  
 Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Ferrofix slotted channel made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for joint sealing and has a circumferential adhesive edge (15 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is suitable for connecting waterproofing layers in accordance with DIN 18534, for all waterproofing classes.

#### Variant

Waterproofing layer on the upper section: Adhesive flange (suitable for moisture barriers)  
 Water exposure class in accordance to DIN W3-I  
 18534-1 (up to and including):  
 Position of sink trap: outside

#### General characteristics

Material: Stainless steel 14301  
 Nominal size (DN): 125  
 Outer diameter (OD): 125 mm  
 Glued flange height: 15 mm

#### Dimensions

Length: 3000 mm  
 Width: 17 mm  
 Height: 75 mm

Coverage features

Type of cover:

Colour of cover:

Width of cover:

Length of cover:

Locking:

Load class:

Slip resistance class:

Slot width:

Slotted cover

silver

200 mm

200 mm

placed

L 15 (EN 1253-1)

R12 according to DIN 51130; C according to DIN

51097

17 mm