


## Floor Tray Ferrofix glued flange H: 15mm, 800x800mm

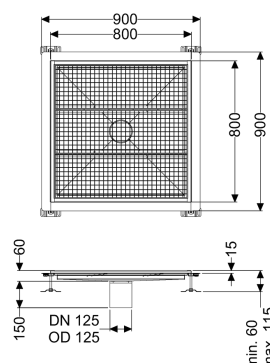

### Article information

Item no.: 6080800  
GTIN: 4026092098622  
Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Ferrofix floor tray made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for joint sealing and has a circumferential adhesive edge (15 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is suitable for connecting waterproofing layers in accordance with DIN 18534, for all waterproofing classes.

#### Variant

Waterproofing layer on the upper section: Connection flange

#### General characteristics

Nominal size (DN): 125  
Outer diameter (OD): 125 mm  
Glued flange height: 15 mm

#### Dimensions

Net weight: 30 kg  
Gross weight: 30 kg  
Length: 800 mm  
Width: 800 mm  
Height: 60 mm  
Packaging dimension: length  
Packaging dimension: width  
Packaging dimension: height

Coverage features

Type of cover:

Slotted cover

Colour of cover:

silver

Locking:

placed

Load class:

L 15 (EN 1253-1)

Upper section material:

Stainless steel 14301