


## Slotted Channel Ferrofix without glued flange, 17x1400mm, outer

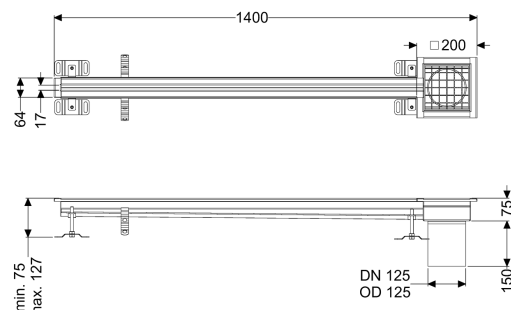

### Article information

Item no.: 6102141  
GTIN: 4026092099711  
Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Slotted Channel Ferrofix made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles.

#### Variant

Waterproofing layer on the upper section:  
Position of sink trap:

Connection flange  
outside

#### General characteristics

Material:  
Nominal size (DN):  
Outer diameter (OD):

Stainless steel 14301  
125  
125 mm

#### Dimensions

Length:  
Width:  
Height:

1400 mm  
17 mm  
75 mm

#### Coverage features

Type of cover:  
Colour of cover:  
Width of cover:  
Length of cover:  
Locking:

Slotted cover  
silver  
200 mm  
200 mm  
placed

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Load class:            | L 15 (EN 1253-1)                                     |
| Slip resistance class: | R12 according to DIN 51130; C according to DIN 51097 |
| Slot width:            | 17 mm                                                |