


Slotted Channel Ferrofix without glued flange, 17x2000mm, middle

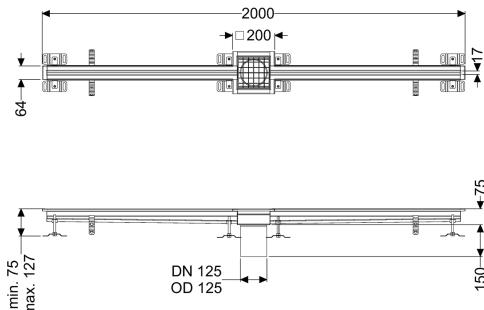

Article information

Item no.: 6102200
 GTIN: 4026092099728
 Price group: 80

Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Slotted Channel Ferrofix made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles.

Variant

Waterproofing layer on the upper section:

Connection flange

Position of sink trap:

central

General characteristics

Material: Stainless steel 14301
 Nominal size (DN): 125
 Outer diameter (OD): 125 mm

Dimensions

Length: 2000 mm
 Width: 17 mm
 Height: 75 mm

Coverage features

Type of cover: Slotted cover
 Colour of cover: silver
 Width of cover: 200 mm
 Length of cover: 200 mm
 Locking: placed

Load class:

L 15 (EN 1253-1)

Slip resistance class:

R12 according to DIN 51130; C according to DIN 51097

Slot width:

17 mm