


Slotted Channel Ferrofix without glued flange, 17x3000mm, middle

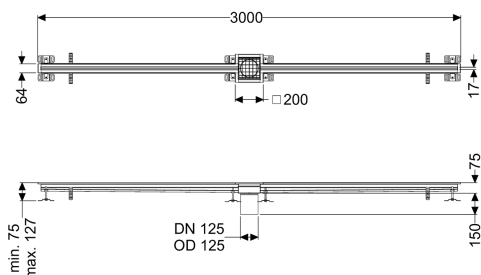

Article information

Item no.: 6102300
 GTIN: 4026092099742
 Price group: 80

Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Slotted Channel Ferrofix made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles.

Variant

Waterproofing layer on the upper section:
 Position of sink trap:

Connection flange
 central

General characteristics

Material:
 Nominal size (DN):
 Outer diameter (OD):

Stainless steel 14301
 125
 125 mm

Dimensions

Length:
 Width:
 Height:

3000 mm
 17 mm
 75 mm

Coverage features

Type of cover:
 Colour of cover:
 Width of cover:
 Length of cover:
 Locking:

Slotted cover
 silver
 200 mm
 200 mm
 placed

| | |
|------------------------|--|
| Load class: | L 15 (EN 1253-1) |
| Slip resistance class: | R12 according to DIN 51130; C according to DIN 51097 |
| Slot width: | 17 mm |