


## Slotted Channel Ferrofix without glued flange, 17x4000mm, outer

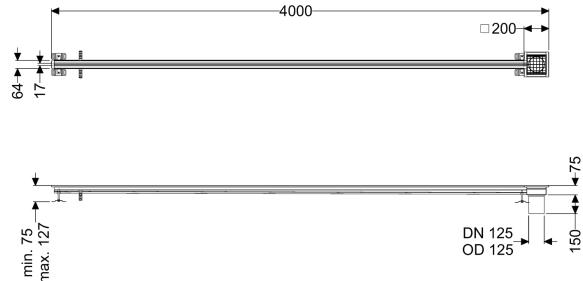

### Article information

Item no.: 6102401  
 GTIN: 4026092099773  
 Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Slotted Channel Ferrofix made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles.

#### Variant

Waterproofing layer on the upper section:  
 Position of sink trap:

Connection flange  
 outside

#### General characteristics

Material: Stainless steel 14301  
 Nominal size (DN): 125  
 Outer diameter (OD): 125 mm

#### Dimensions

Length: 4000 mm  
 Width: 17 mm  
 Height: 75 mm

#### Coverage features

Type of cover: Slotted cover  
 Colour of cover: silver  
 Width of cover: 200 mm  
 Length of cover: 200 mm  
 Locking: placed

Load class:

L 15 (EN 1253-1)

Slip resistance class:

R12 according to DIN 51130; C according to DIN 51097

Slot width:

17 mm