


Pumping station Aquapump Small Mono, Basic, GTF 600

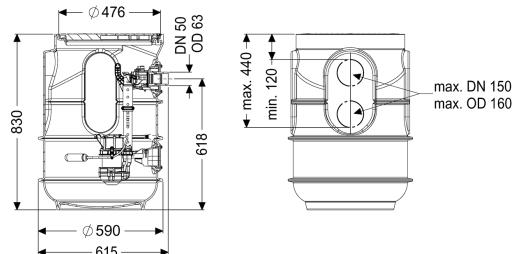

Article information

Item no.: 829810
 GTIN: 4026092092958
 Price group: 20

Advantages

- Including backflow preventer for the pressure pipe
- Including openings for inlet, ventilation and cable duct
- Easy tool-free maintenance

Description

The pumping station without sewage wastewater is suitable for underground installation and is equipped with a backflow preventer for the pressure pipe. The PE tank is resistant to domestic wastewater and includes a pedestrian class polymer cover plate. The pump with multi-vane impeller ensures maximum operating reliability. The components are pre-assembled for final assembly on site. Including openings for inlet. - tank made of PE, resistant to domestic wastewater - with a pedestrian class cover plate made of polymer - including backflow preventer for the pressure pipe - including openings for inlet, ventilation and cable duct - pump/s with multi-vane impeller for maximum operating reliability

Variant

Type of system: Single unit
 Installation: Wet installation
 Pump control: Float switch
 Backflow preventer: integrated

General characteristics

Colour: black
 Standard: EN 12050-2
 Type of wastewater: without sewage
 Installation situation: underground installation

Delivery state:	Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected)
System type:	Mono
Dimensions	
Net weight:	26 kg
Gross weight:	32 kg
Installation depth:	0 - 830 mm
Length:	590 mm
Width:	590 mm
Height:	830 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Tank/drain body	
Pressure pipe connection (DN):	50
Pressure pipe connection (OD):	63 mm
Inlet max. scoring (DN):	100 mm
Pumping volume:	20 l
Coverage features	
Type of cover:	Round cover plate
Colour of cover:	black
Width of cover:	600 mm
Length of cover:	615 mm
Locking:	lockable
Load class:	K 3 (EN 1253-1)
Pumping device	
Pump:	GTF 600
Number of pumps:	1
Weight, pump:	6 kg
Connection type:	Schuko (earthed contact) 2-pin
Operating voltage:	230 V
Protection class:	I
Insulation class:	F
Protection class (pump):	IP 68 (3m)
Temperature monitoring:	integrated
Max. temperature (permanent) of conveyed material:	40 °C
Max. pumping capacity:	12 m ³ /h
Max. pumping height:	8 m
Speed:	2750 U/min
Power P1:	0,65 kW
Power P2:	0,4 kW
Operating mode:	S1
Type of pump connection cable:	H07RN-F 3G 1.5 mm ²
Impeller type:	Multi-vane impeller

Free passage: 30 mm
Switching level, float switch OFF: 160
Switching level, float switch ON: 260
Type of fuse required (pump): C 16 A
Length of mains cable for pump: 10 m
Rated current: 2,9 A

Control

Motor protection switch: yes
Level measurement instrument: Float switch
Mains frequency: 50 Hz
Operating voltage: 230 V
Connection type: Schuko (earthed contact) 2-pin
Length of mains cable for control unit: 1,45 m