


Grease separat. EasyClean Modular free, NS 2, Standard, 3-part, TS

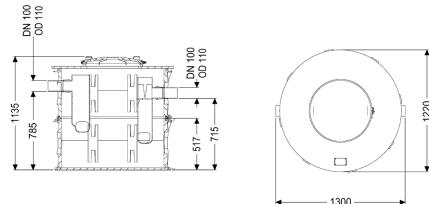

Article information

Item no.: 93002-R2-TS

GTIN: 4026092103999

Price group: 60

Advantages

- Ideal where access is tight
- can be divided into several parts for insertion, for an insertion opening of max. 66 cm
- Low-maintenance operation

Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and comes without metallic components in the tank. Thanks to the modular design, the separator can be inserted even where access is extremely tight. The collecting tank (NS 0.5 with two tanks) made of permanently resistant polymer (PE) is equipped with an integrated sludge trap. A service access cover with odour-tight cover and quick-release closures makes easy access possible for cleaning and maintenance work. Manual disposal is carried out with the tank open. 20 year polyethylene warranty.

Variant

Chamber system: three-piece chamber

Disposal variant: Standard

Shredder-Mix-System: no

Inspection window: no

Nominal size (NS): 2

SonicControl: no

Refill inlet in accordance with DIN 1988: no

Type of disposal: manual with suction hose

General characteristics

Material: PE

Standard: EN 1825

Installation situation: free-standing installation

Delivery state: Installation-ready (connection parts must be connected on site)

Dimensions

Net weight: 95 kg
 Gross weight: 113 kg
 Height tank bottom up to centre section: 550 mm
 Set-up area, height: 1300 mm
 Required access area, length: 1240 mm
 Required access area, width: 1133 mm
 Required access area, height: 580 mm
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Tank/drain body

Distance pipe bottom outlet to tank bottom: 715 mm
 Distance pipe bottom inlet to tank bottom: 785 mm
 Outlet nominal size (OD): 110 mm
 Outlet nominal size (DN): 100 mm
 Inlet nominal size (OD): 110 mm
 Inlet nominal size (DN): 100 mm
 Connection inlet/outlet sockets: PE-HD pipes in accordance with DIN 19537, HT pipes in accordance with DIN 19560, PP or AS

Coverage features

Type of cover: Cover
 Cover material: Polymer
 Colour of cover: black
 Locking: Quick-release closure
 Tightness: odour-tight

Wastewater contents

Separator contents: 380 l
 Total volume: 580 l
 Contents of sludge trap: 200 l
 Storage quantity of grease: 100 l

Control

Control unit: no