


## Grease separat. EasyClean Modular free, NS 4, Standard, 3-part, TS

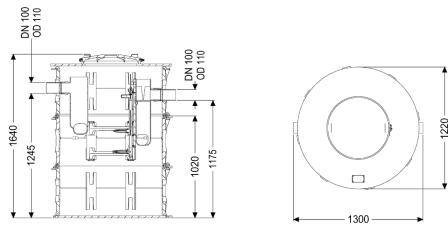

### Article information

Item no.: 93004-R2-TS  
 GTIN: 4026092104019  
 Price group: 60

### Advantages

- Ideal where access is tight
- can be divided into several parts for insertion, for an insertion opening of max. 66 cm
- Low-maintenance operation

### Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and comes without metallic components in the tank. Thanks to the modular design, the separator can be inserted even where access is extremely tight. The collecting tank (NS 0.5 with two tanks) made of permanently resistant polymer (PE) is equipped with an integrated sludge trap. A service access cover with odour-tight cover and quick-release closures makes easy access possible for cleaning and maintenance work. Manual disposal is carried out with the tank open. 20 year polyethylene warranty.

#### Variant

Chamber system:	three-piece chamber
Disposal variant:	Standard
Shredder-Mix-System:	no
Inspection window:	no
Nominal size (NS):	4
SonicControl:	no
Refill inlet in accordance with DIN 1988:	no
Type of disposal:	manual with suction hose

#### General characteristics

Material:	PE
Standard:	EN 1825
Installation situation:	free-standing installation

Delivery state: Installation-ready (connection parts must be connected on site)

**Dimensions**

Net weight: 120 kg  
Gross weight: 138 kg  
Height centre section: 500 mm  
Height tank bottom up to centre section: 550 mm  
Height centre section to top edge of tank: 580 mm  
Set-up area, height: 1300 mm  
Required access area, length: 1240 mm  
Required access area, width: 1633 mm  
Required access area, height: 580 mm  
Packaging dimension: length  
Packaging dimension: width  
Packaging dimension: height

**Tank/drain body**

Distance pipe bottom outlet to tank bottom: 1175 mm  
Distance pipe bottom inlet to tank bottom: 1245 mm  
Outlet nominal size (OD): 110 mm  
Outlet nominal size (DN): 100 mm  
Inlet nominal size (OD): 110 mm  
Inlet nominal size (DN): 100 mm  
Connection inlet/outlet sockets: PE-HD pipes in accordance with DIN 19537, HT pipes in accordance with DIN 19560, PP or AS

**Coverage features**

Type of cover: Cover  
Cover material: Polymer  
Colour of cover: black  
Locking: Quick-release closure  
Tightness: odour-tight

**Wastewater contents**

Separator contents: 560 l  
Total volume: 960 l  
Contents of sludge trap: 400 l  
Storage quantity of grease: 140 l

**Control**

Control unit: no