


Grease separator EasyClean ground NS 8,5, Direct, 875-1165 mm, D, left

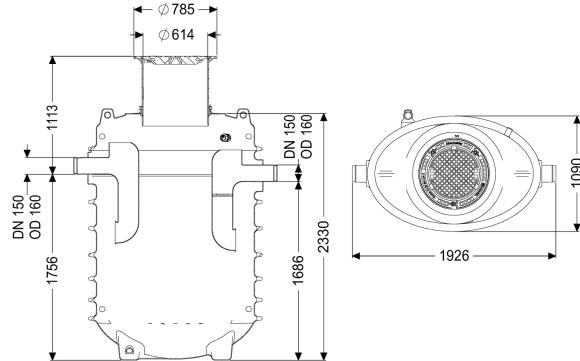

Article information

Item no.: 95085-120D-DL
 GTIN: 4026092101070
 Price group: 60

Advantages

- Low odour and clean disposal
- Defined disposal point
- Complete emptying of the separator

Description

The separator for greasy wastewater is suitable for installation in the ground and comes without metallic structural components in the tank. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap, and has a rounded base for fast and clean disposal. Access for cleaning and maintenance work is possible via a service access cover. A direct disposal pipe socket is available for manual disposal. A load distribution slab must be installed on site for load class D. The reinforcement drawings are part of the EBA and are available from KESSEL. The tank is groundwater resistant up to ground level (GL). 20 year polyethylene warranty.

Variant

Note on installation depth:
 Direction of flow:
 Disposal variant:
 Nominal size (NS):
 Disposal system:
 Type of disposal:
 Load-bearing capacity (DIN 19901):

Installation in the ground, frost-free depth 1200 mm left
 Direct
 8,5
 Disposal pipe
 manual
 E4

General characteristics

Material:
 Standard:
 Installation situation:

PE
 EN 1825
 underground installation

Delivery state: Installation-ready (connection parts must be connected on site)

Dimensions

Net weight: 310 kg
 Gross weight: 315 kg
 Diameter: 648 mm
 Installation depth: 875 - 1165 mm
 Length: 1870 mm
 Width: 1150 mm
 Height: 2375 mm
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Tank/drain body

Distance pipe bottom outlet to tank bottom: 1685 mm
 Distance pipe bottom inlet to tank bottom: 1755 mm
 Outlet nominal size (DN): 150 mm
 Inlet nominal size (OD): 160 mm
 Inlet nominal size (DN): 150 mm
 Connection inlet/outlet sockets: PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS
 Clear width of entry (LW): 600 mm

Coverage features

Type of cover: Cover plate
 Cover material: Grey iron
 Colour of cover: black
 Locking: Lock & Lift
 Load class: D 400 (EN 124)
 Tightness: odour-tight and surface water resistant

Wastewater contents

Separator contents: 850 l
 Max. grease layer thickness: 325 mm
 Total volume: 1700 l
 Contents of sludge trap: 850 l
 Storage quantity of grease: 340 l