


Aqualift S Compact lift stat. Duo, GTF500, resist, Floor sl, tileable

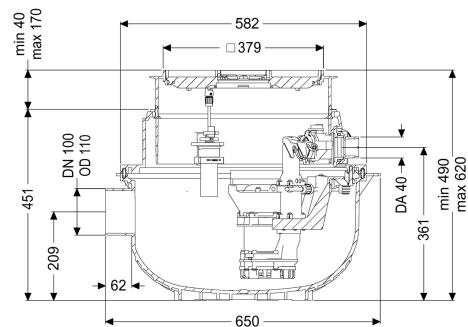

Article information

Item no.: 280530XC
 GTIN: 4026092082713
 Price group: 20

Advantages

- Space-saving due to installation in floor slab with integrated drainage function
- Easy retrofitting from Mono to Duo possible
- Quiet operation, as the pump installation does not cause any structure-borne sound emissions.

Description

The ready to plug in lifting station for faecal-free wastewater is equipped with one or two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) has an open pump tank. One-handed closures enable easy removal of the integrated components. The system for installation in the floor slab is preassembled for final installation on site.

Variant

Type of system:

duo pump

Resistant:

Resistant to waste water containing salt, softener and condensate

Pump control:

Control unit

Backflow preventer:

integrated

General characteristics

Colour:

black

Standard:

EN 12050-2

Type of wastewater:

without sewage

Installation situation:

floor slab installation

Delivery state:

Installation-ready (connection parts must be connected on site)

System type:

Duo

Dimensions

| | |
|--|-------------------------------------|
| Net weight: | 19,28 kg |
| Gross weight: | 20,78 kg |
| Groundwater resistant from lower edge of base section: | 3000 mm |
| Installation depth: | 490 - 620 mm |
| Type of height adjustability: | vertically adjustable upper section |
| Length: | 617 mm |
| Width: | 585 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

Tank/drain body

| | |
|--------------------------------|--------|
| Pressure pipe connection (DN): | 32 |
| Pressure pipe connection (OD): | 40 mm |
| Inlet nominal size (DN): | 100 mm |
| Pumping volume: | 20 l |

Coverage features

| | |
|-----------------------|----------------------|
| Type of cover: | tileable cover plate |
| Cover material: | Polymer |
| Colour of cover: | silver grey |
| Width of cover: | 366 mm |
| Length of cover: | 366 mm |
| Drainage function: | yes |
| Locking: | Lock & Lift |
| Load class: | K 3 (EN 1253-1) |
| Max. flooring height: | 16 mm |

Pumping device

| | |
|--|---------------------|
| Pump: | GTF 500 resistant |
| Number of pumps: | 2 |
| Connection type: | coded plug |
| Protection class (pump): | IP 68 (3m) |
| Temperature monitoring: | integrated |
| Max. temperature (permanent) of conveyed material: | 40 °C |
| Hot water resistance for a short time (2 min): | 80 °C |
| Max. pumping capacity: | 10 m³/h |
| Max. pumping height: | 8 m |
| Speed: | 2800 U/min |
| Power P1: | 0,6 kW |
| Power P2: | 0,36 kW |
| Operating mode: | S1 |
| Type of pump connection cable: | H07RN-F 3G 1.5 mm² |
| Impeller type: | Multi-vane impeller |
| Free passage: | 10 mm |
| Length of mains cable for pump: | 5 m |
| Rated current: | 2,7 A |

Control

| | |
|---|----------------|
| Control unit: | Comfort |
| Alarm sensor: | optical probe |
| Level measurement instrument: | Immersion pipe |
| Type of level measurement: | pneumatic |
| Protection class control unit: | IP 54 |
| Mains frequency: | 50 Hz |
| Operating voltage: | 230 V |
| Connection type: | coded plug |
| Length of mains cable for control unit: | 1,4 m |
| Potential-free contact: | optional |
| GSM interface: | yes |
| USB interface: | yes |
| Log book function: | yes |
| Multi-line display: | yes |
| Battery buffering: | yes |
| Self-diagnosis system (SDS): | yes |
| Type of fuse required (control unit): | C 16 A |