


Grease separator EasyClean free NS 15, Mix, left

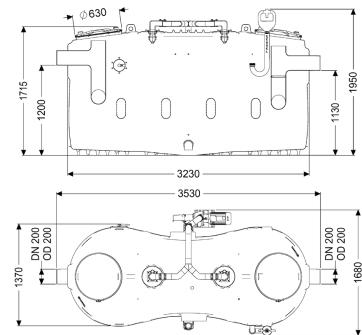

Article information

Item no.: 93015-01-DS-L
 GTIN: 4026092105153
 Price group: 60

Advantages

- Inspection window and Refill inlet as standard
- Simple control
- Low-maintenance operation

Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and comes without metallic components in the tank. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap and has a tapered base for fast and clean disposal. Two odour-tight covers with quick-release closures make easy access possible for cleaning and maintenance work. The innovative Shredder-Mix-System with integrated macerating system is responsible for homogenising and circulating the tank contents. Cleaning is carried out by an exterior pump which can be disconnected from the tank by a shut-off valve. After disposal, a maximum of 3 litres residual sludge volume is left in the tank. A direct disposal pipe socket is available for odour-neutral manual disposal. 20 year polyethylene warranty.

Variant

| | |
|---|------------------------|
| Shut-off valve: | yes |
| Direction of flow: | left |
| Disposal variant: | Mix |
| Shredder-Mix-System: | yes |
| Inspection window: | yes |
| Nominal size (NS): | 15 |
| SonicControl: | no |
| Disposal system: | Disposal connection |
| Refill inlet in accordance with DIN 1988: | yes |
| Type of disposal: | manual cleaning system |
| Water supply: | 1 screw-type valve 1" |
| Load-bearing capacity (DIN 19901): | F3 |

General characteristics

| | |
|-------------------------|--|
| Material: | PE |
| Installation situation: | free-standing installation |
| Delivery state: | Installation-ready (electrical components, connection parts must be connected on site) |
| Scope of delivery: | Storz-B coupling R 2 1/2" for disposal vehicle connection |

Dimensions

| | |
|----------------------|---------|
| Net weight: | 410 kg |
| Gross weight: | 485 kg |
| Set-up area, length: | 3530 mm |
| Set-up area, width: | 1680 mm |
| Set-up area, height: | 1950 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

Tank/drain body

| | |
|---|---|
| Nominal pressure (PN): | 10 |
| Pressure pipe connection (DN): | 65 |
| Pressure pipe connection (OD): | 75 mm |
| Distance pipe bottom outlet to tank bottom: | 1130 mm |
| Distance pipe bottom inlet to tank bottom: | 1200 mm |
| Outlet nominal size (OD): | 200 mm |
| Outlet nominal size (DN): | 200 mm |
| Inlet nominal size (OD): | 200 mm |
| Inlet nominal size (DN): | 200 mm |
| Connection inlet/outlet sockets: | PE-HD pipes in accordance with DIN 19537, HT pipes in accordance with DIN 19560, PP or AS |
| Servicing opening: | 420 mm |

Coverage features

| | |
|------------------|-----------------------|
| Type of cover: | Cover |
| Cover material: | Polymer |
| Colour of cover: | violet |
| Locking: | Quick-release closure |
| Tightness: | odour-tight |

Wastewater contents

| | |
|-----------------------------|--------|
| Separator contents: | 2230 l |
| Total volume: | 3730 l |
| Contents of sludge trap: | 1500 l |
| Storage quantity of grease: | 600 l |

Pumping device

| | |
|-------------------|-------------------|
| Number of pumps: | 1 |
| Connection type: | Direct connection |
| Protection class: | I |

| | |
|--|--|
| Cos phi - power factor: | 0,87 |
| Protection class (pump): | IP 55 |
| Temperature monitoring: | integrated |
| Max. temperature (permanent) of conveyed material: | 40 °C |
| Max. pumping capacity: | 60 m ³ /h |
| Max. pumping height: | 17 m |
| Speed: | 2850 U/min |
| Power P1: | 3,6 kW |
| Power P2: | 3 kW |
| Operating mode: | S2 - 30 min. |
| Type of pump connection cable: | H07RN-F 7G 1.5 mm ² |
| Impeller type: | Radial impeller with macerating system |
| Length of mains cable for pump: | 5 m |
| Rated current: | 6,2 A |
| Control | |
| Control unit: | yes |
| Type of fuse required (RCD): | 30 mA |
| Mains frequency: | 50 Hz |
| Operating voltage: | 400 V |
| Connection type: | Direct connection |